



**NPN BDW83, BDW83A, BDW83B,  
BDW83C, BDW83D,**

**NPN SILICON DARLINGTONS POWER TRANSISTORS**

They are silicon epitaxial-base NPN power monolithic Darlington transistor mounted in Jedec TO-218 plastic package.

They are intended for use in power linear and switching applications.

The complementary are BDW84, BDW84A, BDW84B, BDW84C, BDW84D

Compliance to RoHS.

**ABSOLUTE MAXIMUM RATINGS**

Symbol	Ratings		Value	Unit	
$V_{CEO}$	Collector-Emitter Voltage	$I_B = 0$	BDW83	45	V
			BDW83A	60	
			BDW83B	80	
			BDW83C	100	
			BDW83D	120	
$V_{CBO}$	Collector- Emitter Voltage	$I_E = 0$	BDW83	45	V
			BDW83A	60	
			BDW83B	80	
			BDW83C	100	
			BDW83D	120	
$V_{EBO}$	Emitter-Base Voltage	$I_C = 0$	5	V	
$I_C$	Collector Current		15	A	
$I_B$	Base Current		0.5	A	
$P_t$	Total Power Dissipation	25°C case temperatur	150	W	
		25°C free aire temperatur	3.5		
$T_J$	Junction Temperature		-65 to +150	°C	
$T_{Stg}$	Storage Temperature		-65 to +150	°C	

**THERMAL CHARACTERISTICS**

Symbol	Ratings	Value	Unit
$R_{thJC}$	Junction to Case Thermal Resistance	0.83	°C/W
$R_{thJA}$	Junction to Free Air Thermal Resistance	35.7	

## NPN BDW83, BDW83A, BDW83B, BDW83C, BDW83D,

### ELECTRICAL CHARACTERISTICS


TC=25°C unless otherwise noted

Symbol	Ratings	Test Condition(s)	Min	Typ	Max	Unit	
$V_{CEO(SUS)}$	Collector-Emitter Sustaining Voltage (*)	$I_C=30\text{ mA}$ $I_B=0$	BDW83	45	-	-	V
			BDW83A	60	-	-	
			BDW83B	80	-	-	
			BDW83C	100	-	-	
			BDW83D	120	-	-	
$I_{CEO}$	Collector Cutoff Current	$I_B=0, V_{CE}=30\text{ V}$	BDW83	-	-	1	mA
			BDW83A				
			BDW83B				
			BDW83C				
			BDW83D				
$I_{CBO}$	Collector Cutoff Current	$I_E=0, V_{CB}=45\text{ V}$	BDW83	-	-	0.5	mA
			BDW83A				
			BDW83B				
			BDW83C				
			BDW83D				
		$I_E=0, V_{CB}=60\text{ V}$	BDW83	-	-	5	
			BDW83A				
			BDW83B				
			BDW83C				
			BDW83D				
$I_{EBO}$	Emitter Cutoff Current	$V_{EB}=5.0\text{ V}, I_C=0$	-	-	2	mA	
			$I_C=6\text{ A}, V_{CE}=3.0\text{ V}$	750	-	20 K	-
			$I_C=15\text{ A}, V_{CE}=3.0\text{ V}$	100	-	-	-
			$I_C=6\text{ A}, I_B=12\text{ mA}$	-	-	2.5	V
			$I_C=15\text{ A}, I_B=150\text{ mA}$	-	-	4	
$V_{BE(on)}$	Base-Emitter Voltage (*)	$I_C=6\text{ A}, I_B=3\text{ A}$	-	-	2.5		
$V_{EC}$	Parallel Diode Forward Voltage	$I_E=15\text{ A}, I_E=0$	-	-	3.5	V	
$t_{on}$	Turn-on time	$I_C=10\text{ A}, I_{B1}=-I_{B2}=40\text{ mA}$	-	0.9	-	$\mu\text{s}$	
$t_{off}$	Turn-off time	$R_L=3\Omega; V_{BE(off)}=-4.2\text{ V}$ Duty Cycle $\leq 2\%$	-	7	-		

(\*) Pulse Duration = 300  $\mu\text{s}$ , Duty Cycle  $\leq 2\%$

## NPN BDW83, BDW83A, BDW83B, BDW83C, BDW83D,

### MECHANICAL DATA CASE TO3PN Non Isolated Plastic Package

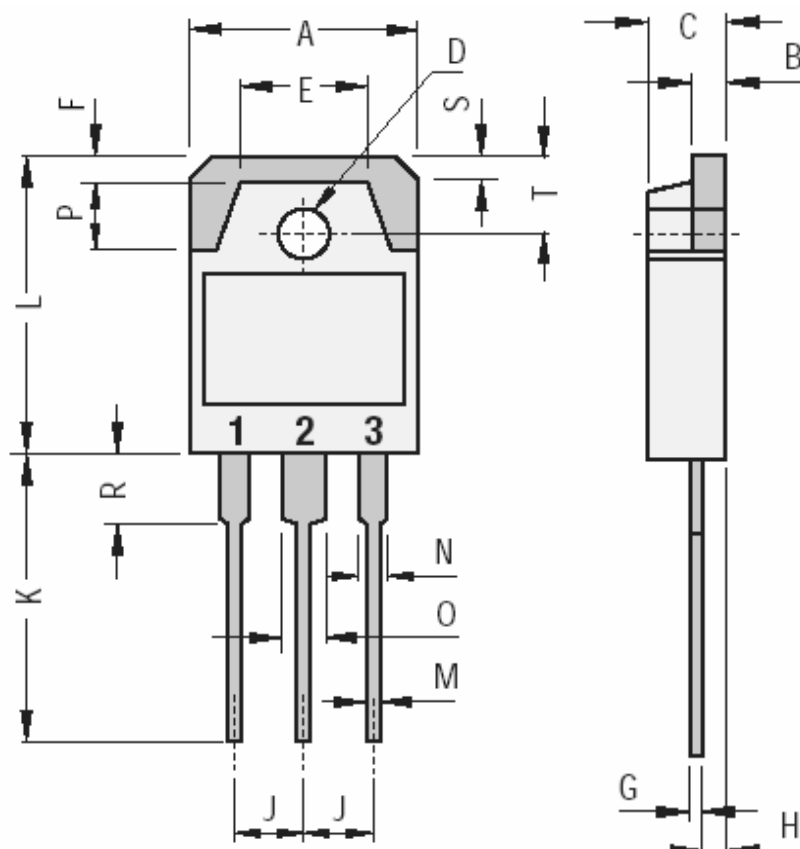

DIMENSIONS (mm)		
	Min.	Max.
A	15.20	1600
B	1.90	2.10
C	4.60	5.00
D	3.10	3.30
E		9.60
F		2.00
G	0.35	0.55
H		1.40
J	5.35	5.55
K	20.00	
L	19.60	20.20
M	0.95	1.25
N		2.00
O		3.00
P		4.00
R		4.00
S		1.80
T	4.80	5.20

Pin 1 :	Base
Pin 2 :	Collector
Pin 3 :	Emitter

The centre pin is in electrical contact with the mounting tab.

Revised August 2012

Information furnished is believed to be accurate and reliable. However, Comset Semiconductors assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. Data are subject to change without notice. Comset Semiconductors makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Comset Semiconductors assume any liability arising out of the application or use of any product and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Comset Semiconductors' products are not authorized for use as critical components in life support devices or systems.