



## NPN BD241 – A – B – C

### MEDIUM POWER LINEAR AND SWITCHING APPLICATIONS.

The BD241, A, B, C are the NPN transistors mounted in Jedec TO-220 plastic package. They are the silicon epitaxial-base Power Transistors for use in medium power linear and switching applications. The PNP complements are BD242, A, B, C. Compliance to RoHS.

#### ABSOLUTE MAXIMUM RATINGS

Symbol	Ratings		Value	Unit
$V_{CEO}$	Collector-Emitter Voltage ( $I_B = 0$ )	BD241	45	V
		BD241A	60	
		BD241B	80	
		BD241C	100	
$V_{CER}$	Collector-Emitter Voltage ( $R_{BE} = 100 \Omega$ )	BD241	55	V
		BD241A	70	
		BD241B	90	
		BD241C	115	
$V_{EBO}$	Emitter-Base Voltage ( $I_C = 0$ )	BD241	5.0	V
		BD241A		
		BD241B		
		BD241C		
$I_C$	Collector Current	$I_C$	3	A
		$I_{CM}$	5	
$I_B$	Base Current		1	A
$P_T$	Power Dissipation	@ $T_{amb} = 25^\circ C$	2	W
		@ $T_{case} = 25^\circ C$	40	W
$T_J$	Junction Temperature		150	$^\circ C$
$T_S$	Storage Temperature		-65 to +150	

#### THERMAL CHARACTERISTICS

Symbol	Ratings	Value	Unit
$R_{thJ-amb}$	Thermal Resistance, Junction-ambient	62.5	$^\circ C/W$
$R_{thJ-case}$	Thermal Resistance, Junction-case	3.13	$^\circ C/W$

## NPN BD241 – A – B – C

### ELECTRICAL CHARACTERISTICS

TC=25°C unless otherwise noted


Symbol	Ratings	Test Condition(s)	Min	Typ	Max	Unit	
$I_{CEO}$	Collector Cutoff Current	$V_{CE}=30\text{ V}$	BD241	-	-	0.3	mA
		$V_{CE}=30\text{ V}$	BD241A	-	-		
		$V_{CE}=60\text{ V}$	BD241B	-	-		
		$V_{CE}=60\text{ V}$	BD241C	-	-		
$I_{EBO}$	Emitter Cutoff Current	$V_{BE}=5\text{ V}$	BD241	-	-	1.0	mA
			BD241A	-	-		
			BD241B	-	-		
			BD241C	-	-		
$I_{CES}$	Collector Cutoff Current ( $V_{BE} = 0$ )	$V_{CE}=55\text{ V}$	BD241	-	-	0.2	mA
		$V_{CE}=70\text{ V}$	BD241A	-	-		
		$V_{CE}=90\text{ V}$	BD241B	-	-		
		$V_{CE}=115\text{ V}$	BD241C	-	-		
$V_{CEO(sus)}$	Collector-Emitter Sustaining Voltage ( $I_B = 0$ ) (*)	$I_C = 30\text{mA}$	BD241	45		V	
			BD241A	60			
			BD241B	80			
			BD241C	100			
$h_{FE}$	DC Current Gain (*)	$V_{CE}=4\text{ V}, I_C=1\text{ A}$	BD241	25	-	-	-
			BD241A				
			BD241B				
			BD241C				
		$V_{CE}=4\text{ V}, I_C=3\text{ A}$	BD241	10	-	-	
			BD241A				
			BD241B				
			BD241C				
$V_{CE(SAT)}$	Collector-Emitter saturation Voltage (*)	$I_C=3\text{ A}, I_B=0.6\text{ A}$	BD241	-	-	1.2	V
			BD241A				
			BD241B				
			BD241C				
$V_{BE(on)}$	Base-Emitter Voltage (*)	$V_{CE}=4\text{ V}, I_C=3\text{ A}$	BD241	-	-	1.8	V
			BD241A				
			BD241B				
			BD241C				
$h_{fe}$	Small Signal Current Gain	$V_{CE}=10\text{ V}$ $I_C=0.5\text{ A}$ $f = 1\text{ KHz}$	BD241	20	-	-	-
			BD241A				
			BD241B				
			BD241C				
		$V_{CE}=10\text{ V}$ $I_C=0.5\text{ A}$ $f = 1\text{ MHz}$	BD241	3	-	-	
			BD241A				
			BD241B				
			BD241C				

(\*) Pulse Width  $\approx 300\ \mu\text{s}$ , Duty Cycle  $\angle 2.0\%$

## NPN BD241 – A – B – C

### MECHANICAL DATA CASE TO-220

DIMENSIONS (mm)		
	Min.	Max.
A	9,90	10,30
B	15,65	15,90
C	13,20	13,40
D	6,45	6,65
E	4,30	4,50
F	2,70	3,15
G	2,60	3,00
H	15,75	17,15
L	1,15	1,40
M	3,50	3,70
N	-	1,37
P	0,46	0,55
R	2,50	2,70
S	4,98	5,08
T	2,49	2,54
U	0,70	0,90

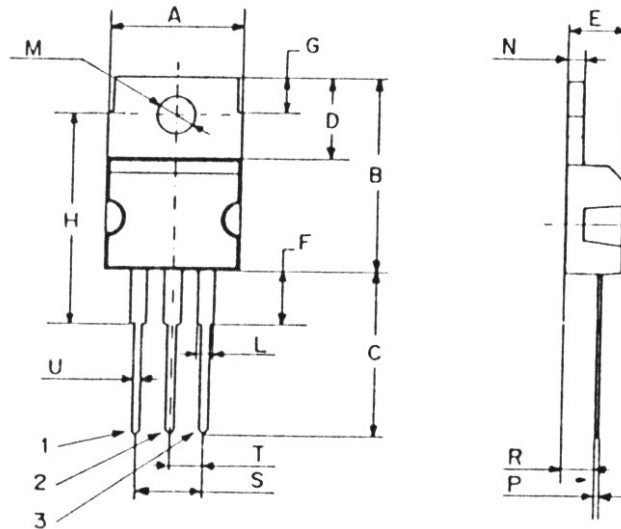

Pin 1 :	Base
Pin 2 :	Collector
Pin 3 :	Emitter
Case :	Collector

Revised September 2012

Information furnished is believed to be accurate and reliable. However, Comset Semiconductors assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. Data are subject to change without notice. Comset Semiconductors makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Comset Semiconductors assume any liability arising out of the application or use of any product and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Comset Semiconductors' products are not authorized for use as critical components in life support devices or systems.